


**APPLICATIONS:** This versatile slide is designed for use in a variety of heavy-duty storage applications. Please preview the application information provided on the following pages for further load rating information.

Extra Heavy Duty  
Full Extension Drawer Slide  
Up to 600-lb. [272 kg.] Load Rating\*  
Optional Accessory Platform Brackets

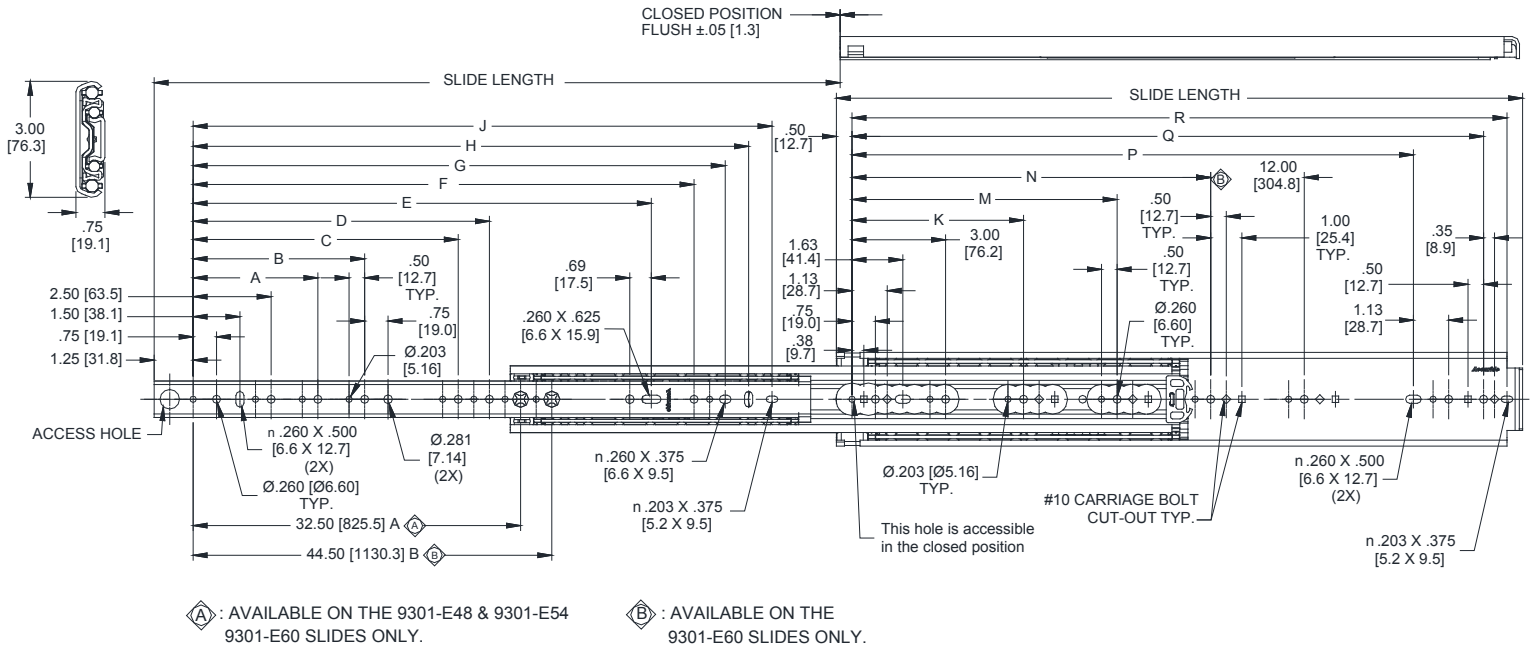

Inch  
[mm]

Note: Maximum screw head of .190" [4.8mm] high by .500" [12.7mm] diameter necessary to clear traversing members.


<b>Finish</b>	Bright electro-zinc (C) plating	
<b>Lengths</b>	Even lengths 10"–36", 40", 42", 44", 48", 54" and 60" Even lengths [254.0 mm–914.4 mm, 1016.0 mm, 1066.8 mm, 1117.6 mm, 1219.2 mm, 1371.6 mm, 1447.8 mm, and 1524.0 mm]	
<b>Travel</b>	Full extension	
<b>Height</b>	3.00" [76.2 mm]	
<b>Load Rating</b>	Moderate Use	Up to 600 lbs. [272 kg] per pair.*
	Frequent Use	Up to 480 lbs. [217 kg] per pair.**
	Flat Mount	Up to 180 lbs. [81 kg] per pair.***
<b>Side Space</b>	.75" (+.031, -.000) [19.1 mm (+.79, -.00)]	
<b>Mounting</b>	Side or flat Optional accessory platform brackets available	
<b>Movement</b>	Steel ball bearings	
<b>Hardware</b>	<b>Customer supplied mounting hardware</b> <b>Metal Applications:</b> ¼" hex-head or pan head [M6 Euro] screw for .260" [6.6 mm] holes; or, hex-head or pan head [M5 Euro] screw for .203" [5.2 mm] holes; or, #10 carriage bolt for diamond and square-shaped holes. <b>Wood Applications:</b> ¼" lag or sheet metal screw; or, #10 lag or sheet metal screw. Maximum screw head of .190" [4.8 mm] high by .500" [12.7 mm] diameter necessary to clear traversing slide members; or, #10 carriage bolt for diamond and square-shaped holes.	
<b>Features</b>	Bumpers provide extra silencing during drawer closure and opening. Bridged ball spacer reduce migration and drag.	

Part Number	Slide Length	Slide Travel	A	B	C	D	E	F	G	H	J	K	M	N	P	Q	R
9301-E10	10.00 [254.0]	10.00 [254.0]						4.06 [103.1]	5.06 [128.5]	5.81 [147.6]	6.56 [166.6]				6.00 [152.4]	8.25 [209.6]	9.00 [228.6]
9301-E12	12.00 [304.8]	12.00 [304.8]						6.06 [153.9]	7.06 [179.3]	7.81 [198.4]	8.56 [217.4]				8.00 [203.2]	10.25 [260.4]	11.00 [279.4]
9301-E14	14.00 [355.6]	14.00 [355.6]						8.06 [204.7]	9.06 [230.1]	9.81 [249.2]	10.56 [268.2]				10.00 [254.0]	12.25 [311.2]	13.00 [330.2]
9301-E16	16.00 [406.4]	16.00 [406.4]	5.00 [127.0]					10.06 [255.5]	11.06 [280.9]	11.81 [299.9]	12.56 [319.0]				12.00 [304.8]	14.25 [361.9]	15.00 [381.0]
9301-E18	18.00 [457.2]	18.00 [457.2]	5.00 [127.0]				9.69 [246.1]	12.06 [306.3]	13.06 [331.7]	13.81 [350.8]	14.56 [369.8]				14.00 [355.6]	16.25 [412.8]	17.00 [431.8]
9301-E20	20.00 [508.0]	20.00 [508.0]	5.00 [127.0]	7.50 [190.5]			11.69 [296.9]	14.06 [357.1]	15.06 [382.5]	15.81 [401.6]	16.56 [420.6]				16.00 [406.4]	18.25 [463.6]	19.00 [482.6]
9301-E22	22.00 [558.8]	22.00 [558.8]	5.00 [127.0]	7.50 [190.5]			13.69 [347.7]	16.06 [407.9]	17.06 [433.3]	17.81 [452.4]	18.56 [471.4]				18.00 [457.2]	20.25 [514.4]	21.00 [533.4]
9301-E24	24.00 [609.6]	24.00 [609.6]	5.00 [127.0]	7.50 [190.5]			15.69 [398.5]	18.06 [458.7]	19.06 [484.1]	19.81 [503.2]	20.56 [522.2]				20.00 [508.0]	22.25 [565.2]	23.00 [584.2]
9301-E26	26.00 [660.4]	26.00 [660.4]	5.00 [127.0]	7.50 [190.5]			17.69 [449.3]	20.06 [509.5]	21.06 [534.9]	21.81 [553.9]	22.56 [573.0]				22.00 [558.8]	24.25 [615.9]	25.00 [635.0]
9301-E28	28.00 [711.2]	28.00 [711.2]	5.00 [127.0]	7.50 [190.5]			19.69 [500.1]	22.06 [560.3]	23.06 [585.7]	23.81 [604.8]	24.56 [623.8]				24.00 [609.6]	26.25 [666.8]	27.00 [685.8]
9301-E30	30.00 [762.0]	30.00 [762.0]	5.00 [127.0]	7.50 [190.5]	14.50 [368.3]		21.69 [550.9]	24.06 [611.1]	25.06 [636.5]	25.81 [655.6]	26.56 [674.6]	9.25 [234.9]		19.75 [501.6]	26.00 [660.4]	28.25 [717.6]	29.00 [736.6]
9301-E32	32.00 [812.8]	32.00 [812.8]	5.00 [127.0]	7.50 [190.5]	14.50 [368.3]		23.69 [601.7]	26.06 [661.9]	27.06 [687.3]	27.81 [706.4]	28.56 [725.4]	9.25 [234.9]	15.50 [393.7]	21.75 [552.5]	28.00 [711.2]	30.25 [768.4]	31.00 [787.4]
9301-E34	34.00 [863.6]	34.00 [863.6]	5.00 [127.0]	7.50 [190.5]	14.50 [368.3]	18.50 [469.9]	25.69 [652.5]	28.06 [712.7]	29.06 [738.1]	29.81 [757.2]	30.56 [776.2]	9.25 [234.9]	16.50 [419.1]	23.75 [603.3]	30.00 [762.0]	32.25 [819.2]	33.00 [838.2]
9301-E36	36.00 [914.4]	36.00 [914.4]	5.00 [127.0]	7.50 [190.5]	14.50 [368.3]	20.50 [520.7]	27.69 [703.3]	30.06 [763.5]	31.06 [788.9]	31.81 [807.9]	32.56 [827.0]	9.25 [234.9]	17.50 [444.5]	25.75 [654.1]	32.00 [812.8]	34.25 [870.0]	35.00 [889.0]
9301-E40	40.00 [1016.0]	40.00 [1016.0]	5.00 [127.0]	7.50 [190.5]	14.50 [368.3]	20.50 [520.7]	31.69 [804.9]	34.06 [865.1]	35.06 [890.5]	35.81 [909.6]	36.56 [928.6]	9.25 [235.0]	21.50 [546.1]	29.75 [755.7]	36.00 [914.4]	38.25 [971.6]	39.00 [990.6]
9301-E42	42.00 [1066.8]	42.00 [1066.8]	5.00 [127.0]	7.50 [190.5]	14.50 [368.3]	20.50 [520.7]	33.69 [855.7]	36.06 [915.9]	37.06 [941.3]	37.81 [960.4]	38.56 [979.4]	9.25 [235.0]	21.50 [546.1]	31.75 [806.5]	38.00 [965.2]	40.25 [1022.4]	41.00 [1041.4]
9301-E44	44.00 [1117.6]	44.00 [1117.6]	5.00 [127.0]	7.50 [190.5]	14.50 [368.3]	20.50 [520.7]	35.69 [906.5]	38.06 [966.7]	39.06 [992.1]	39.81 [1011.2]	40.56 [1030.2]	9.25 [235.0]	21.5 [546.1]	33.75 [857.3]	40.00 [1016.0]	42.25 [1073.2]	43.00 [1092.2]
9301-E48	48.00 [1219.2]	48.00 [1219.2]	5.00 [127.0]	7.50 [190.5]	14.50 [368.3]	20.50 [520.7]	39.69 [1008.1]	42.06 [1068.3]	43.06 [1093.7]	43.81 [1112.8]	44.56 [1131.8]	9.25 [234.9]	23.50 [596.9]	37.75 [958.9]	44.00 [1117.6]	46.25 [1174.8]	47.00 [113.8]
9301-E54	54.00 [1371.6]	54.00 [1371.6]	5.00 [127.0]	7.50 [190.5]	14.50 [368.3]	20.50 [520.7]	45.69 [1160.5]	48.06 [1220.7]	49.06 [1246.1]	49.81 [1265.1]	50.56 [1284.2]	9.25 [234.9]	23.50 [596.6]	37.75 [958.9]	50.00 [1270]	52.25 [1327.1]	53.00 [1346.2]
9301-E60	60.00 [1524.0]	60.00 [1524.0]	5.00 [127.0]	7.50 [190.5]	14.50 [368.3]	20.50 [520.7]	51.69 [1312.9]	54.06 [1373.1]	55.06 [1398.5]	55.81 [1417.6]	56.56 [1436.6]	9.25 [234.9]	23.50 [596.9]	37.75 [958.9]	56.00 [1422.4]	58.25 [1479.6]	59.00 [1498.6]

**Moderate:** *Up to 600 lbs [272 kg] per pair.*  
Load rating based on a 22" slide in a 24" wide drawer, cycled 10,000 times in a horizontal position.\*

**Frequent:** *Up to 480 lbs [217 kg] per pair.*  
Load rating based on a 22" slide in a 42" wide drawer, cycled 75,000 times in a horizontal position.\*\*

**Flat:** *Up to 180 lbs [81 kg] per pair.*  
Load rating based on a 22" slide in a 32" wide drawer, cycled 10,000 times in a horizontal position.\*\*\*

 **CAUTION:** This slide should never be used as a pull-out step platform or any other application supporting human weight as injury may result.

**Note:** Specified mounting hardware is not included in packaging.

**Side Mounting**

To install the cabinet (outer) member, first fully extend the slides to provide access to the mounting holes. Be sure slides are parallel. Insert the 1/4" head-hex or pan head screws (M6 Euro) through the horizontal slots.

Attach the drawer to the extended inner members with 1/4" hex-head or pan head screws (M6 Euro) inserted through the vertical slots. Leave all screws loose for final adjustment. Adjust slide positions until movement is smooth. Then tighten all screws; if necessary, use more screws to secure slides and complete installation. See Figure 1.

**Flat Mounting**

Position the large (outer) members on the cabinet opening base as shown in Figure 2. Align slides flush to the edge of the drawer bottom. Be sure slides are parallel. Fully extend the slides to provide access to the mounting holes. Insert the 1/4" hex-head or pan head screws (M6 Euro) through the horizontal slots.

Install the 1/4" hex-head or pan head screws (M6 Euro) through the vertical slots in the drawer (inner) member into the bottom of the drawer. Leave all screws loose for final adjustment. Adjust slide positions until movement is smooth. Then tighten all screws; if necessary, use more screws to secure slides and complete installation.

**Carriage Bolt Mounting Considerations**

When using carriage bolts, the squared neck of the bolt will extend beyond the thickness of the cabinet member. Therefore, carriage bolts must be used with mounting surfaces that allow for the insertion of the protruding neck of the bolt (i.e. aluminum or wood). Otherwise, the mounting surface must have a hole to provide clearance for the protruding neck. This is required to fasten the slides securely to the cabinet. See Figure 5, for the minimum dimensions required for the clearance hole.





Carriage bolts may be used to secure the cabinet member only; carriage bolt mounting holes are not available on the drawer member. Be aware that when using carriage bolt mounting holes, the adjacent holes will become unavailable for mounting.

**Note:** Platform bracket kits are not compatible with the carriage bolt mounting method.

**Side Mounting (Carriage Bolt)**

To install the cabinet member (outer) member, first fully extend the slides to provide access to mounting holes. Be sure slides are parallel. Insert the carriage bolts (customer-supplied) through the diamond or square shaped holes. The diamond-shaped and square holes accommodate #10 type carriage bolt. See Figure A.

Attach the drawer to the extended inner members with 1/4" hex-head or pan head screws (M6 Euro). Leave all screws loose for final adjustment. Adjust slide positions until movement is smooth. Then tighten all screws and nuts; if necessary, use more screws to secure slides and complete installation. See Figure 3.

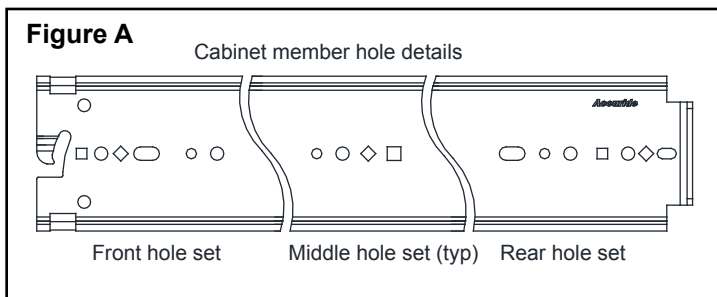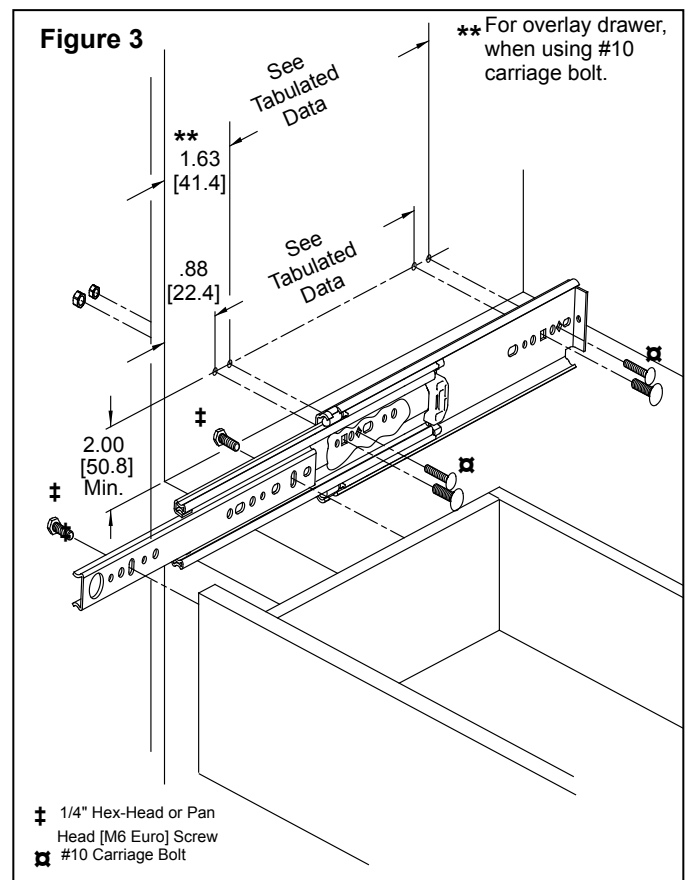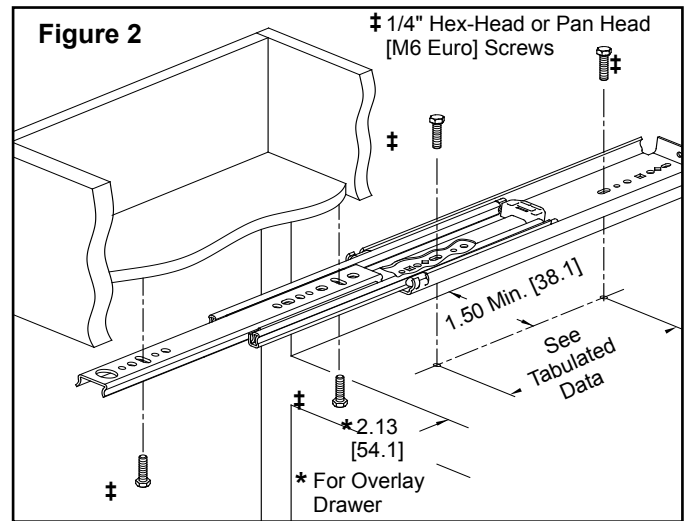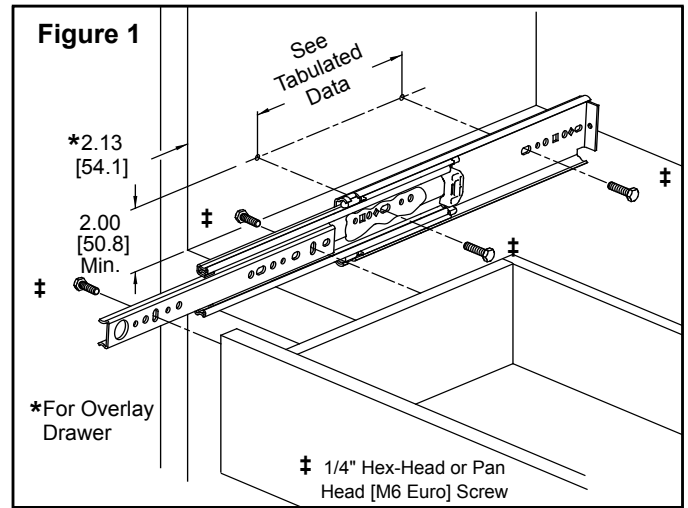

**Flat Mounting (Carriage Bolt)**

Position the large (outer) members on the cabinet floor as shown in Figure 4. Align slides flush to the edge of the drawer bottom. Be sure slides are parallel. Insert the carriage bolts (customer-supplied) through the diamond or square shaped holes. The diamond-shaped holes accommodate #10 type carriage bolt; the square holes accommodate #10 (M6 Euro) type carriage bolts. See Figure A.


Install the 1/4" hex-head or pan head screws (M6 Euro) through the vertical slots in the drawer (inner) members into the bottom of the drawer. Leave all screws loose for final adjustment. Adjust slide position until movement is smooth. Then tighten all screws and nuts; use more screws to secure slides and complete installation.

**Optional Platform Bracket Kits**

Brackets provide four bottom-mount and two side-mount options. For bottom-mount, one bracket attaches to the slide outer member and the cabinet base. The other bracket attaches to the slide inner member and the platform or tray. For side-mount, the bracket attaches to the slide inner member. See Figure 6 for examples of both mounting options. When the brackets are used either individually or in combination, they will accommodate all slide lengths. Each kit contains two brackets, four 1/4" hex-head screws, and four 1/4" hex nuts with lock washers. See separate platform bracket data sheet for more information.

**Slide Ordering Instructions**

Complete your slide order for model 9301E by specifying the following:

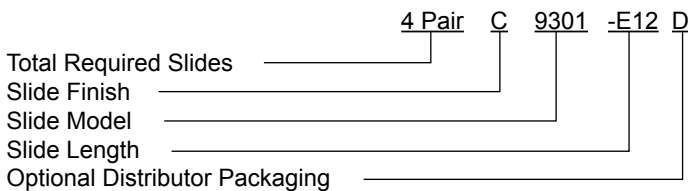

**Packaging**

**Distributor (D) Pack:** One pair of slides packaged in polybag. **Mounting hardware not included.**

Slide Lengths: 10"–22" 4 pair per box  
 24"–40" 2 pair per box  
 42", 44" 1 pair per box




**Bulk (P) Orders:** Slides only.  
 Slide Lengths: 10"–22" 4 pair per box  
 24"–40" 2 pair per box  
 42", 44", 48", 54", 60" 1 pair per box

**Specifications**

Slide members: Cold rolled steel  
 Ball spacers: Polymer  
 Ball bearings: Carburized steel  
 RoHS compliant

**NOTE:** Specifications, materials, prices, terms, and delivery are subject to change without notice

For the most current technical information please visit [www.accuride.com](http://www.accuride.com)

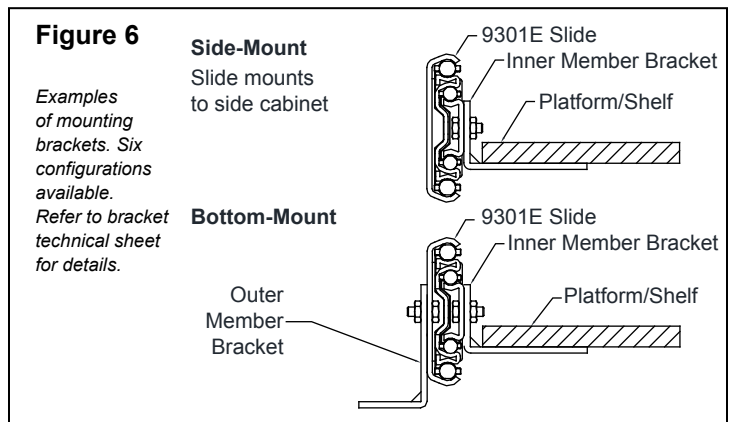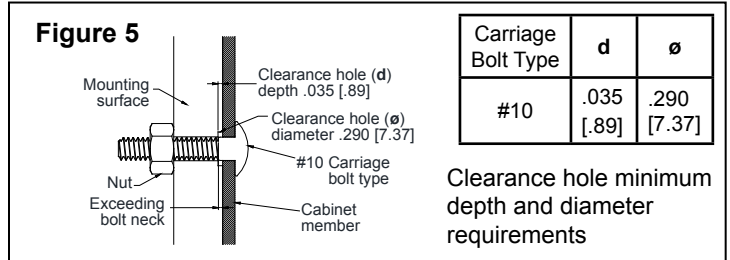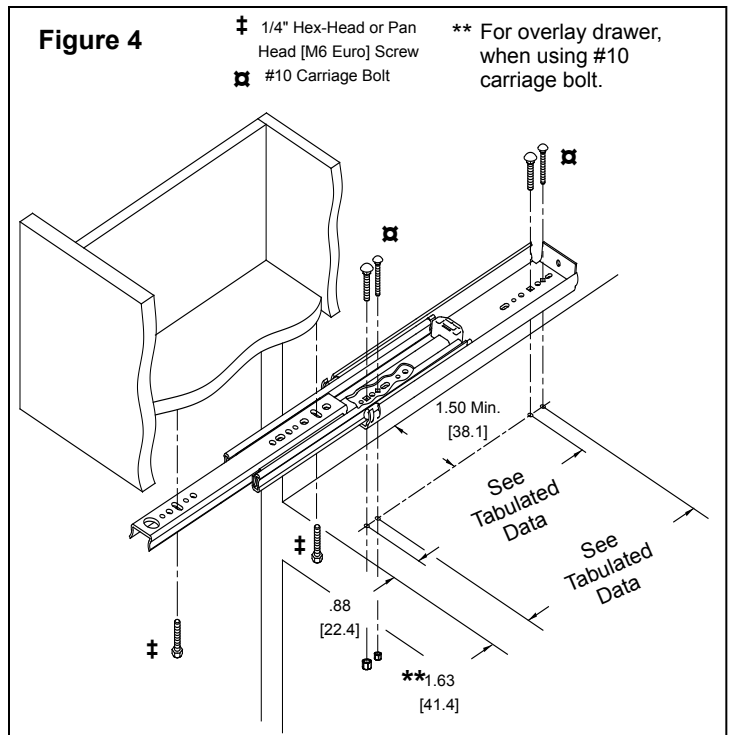

Accuride International Inc.

12311 Shoemaker Avenue  
 Santa Fe Springs, CA 90670  
 TEL (562) 903-0200  
 FAX (562) 903-0208

Manufacturing, Engineering, and Sales  
 United States • Germany • Japan •  
 Mexico • United Kingdom • China

For the most current technical information visit [www.accuride.com](http://www.accuride.com)

**WARNING:** This product can expose you to chemicals including nickel, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

Copyright © 2019 Accuride International Inc. 3700-9589-MK056-R12-0519