




AMERICAN SPECIALTIES, INC.
 441 Saw Mill River Road, Yonkers, NY 10701
 (914) 476.9000 • (914) 476.0688
 www.americanspecialties.com

MODEL №: 1200-V

ISSUED: 01-87

REVISED: 03 JUN 2019

VINYL SHOWER CURTAIN

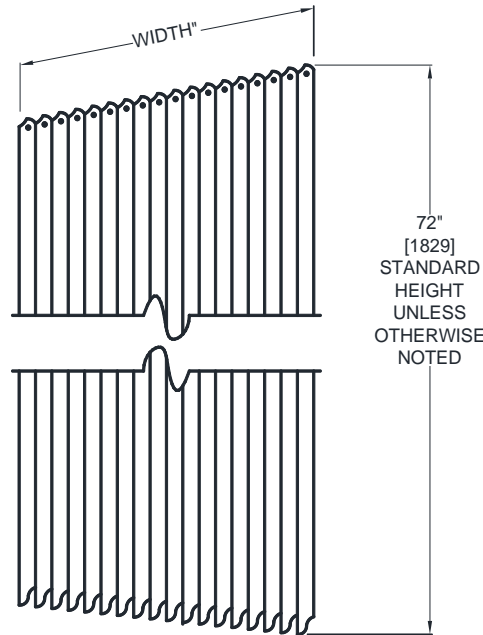

NOTE:
 ALL DIM'S INCH [MM]
 ILLUSTRATION FOR REF ONLY AND NTS

SPECIFICATION

Shower Curtain shall be fabricated of .00825" [0,21] thick PVC sheet treated with a broad spectrum antimicrobial agent to inhibit the growth of fungal, bacterial and algal organisms. Protection agents shall remain in effect after repeated low-temperature mild soap washing and air-drying cycles. Top hem shall be 1-1/2" [38] wide, backing reinforced and heat-sealed above and below grommet row. Bottom hem and vertical edges shall be plain edge. Clear anodized aluminum grommets with 3/8" inside diameter [Ø9,5] shall be machined into top hem at 6-1/2" ± 1/2" [165 ± 13] intervals on centers starting at 1-1/4" ± 1/4" [32 ± 6] from edges. Color shall be white. Pattern is San Suede Pebble Emboss № SS9700. Effective inhibition has been demonstrated via testing in accordance with ASTM G2190, ASTM E1428 and AATCC Test Method 147-1998.

Vinyl Shower Curtain shall be Model № 1200-Vxx (specify size per chart) of American Specialties, Inc., Yonkers, NY 10701-4913

INSTALLATION

For openings up to 42" [1067] wide curtains should be specified an additional 6" [152] wider than opening and 12" [305] wider for openings exceeding 42" [1067]. Shower curtain should be attached with hooks (not provided, order separately) to rod (not provided, order separately). Curtain hooks Model № 1200-SHU are recommended.

<u>SIZE SPECIFICATION</u>					
OPENING	XX	OPENING	XX	OPENING	XX
30" [762]	36" [914]	42" [1067]	48" [1219]	60" [1524]	72" [1829]
36" [914]	42" [1067]	48" [1219]	60" [1524]	72" [1829]	84" [2134]

<u>HOOKS COUNT (1200-SHU SUGGESTED) REQUIRED</u>					
CURTAIN WIDTH	HOOK COUNT	CURTAIN WIDTH	HOOK COUNT	CURTAIN WIDTH	HOOK COUNT
36" [914]	6	48" [1219]	8	72" [1829]	12
42" [1067]	7	60" [1524]	10	84" [2134]	14