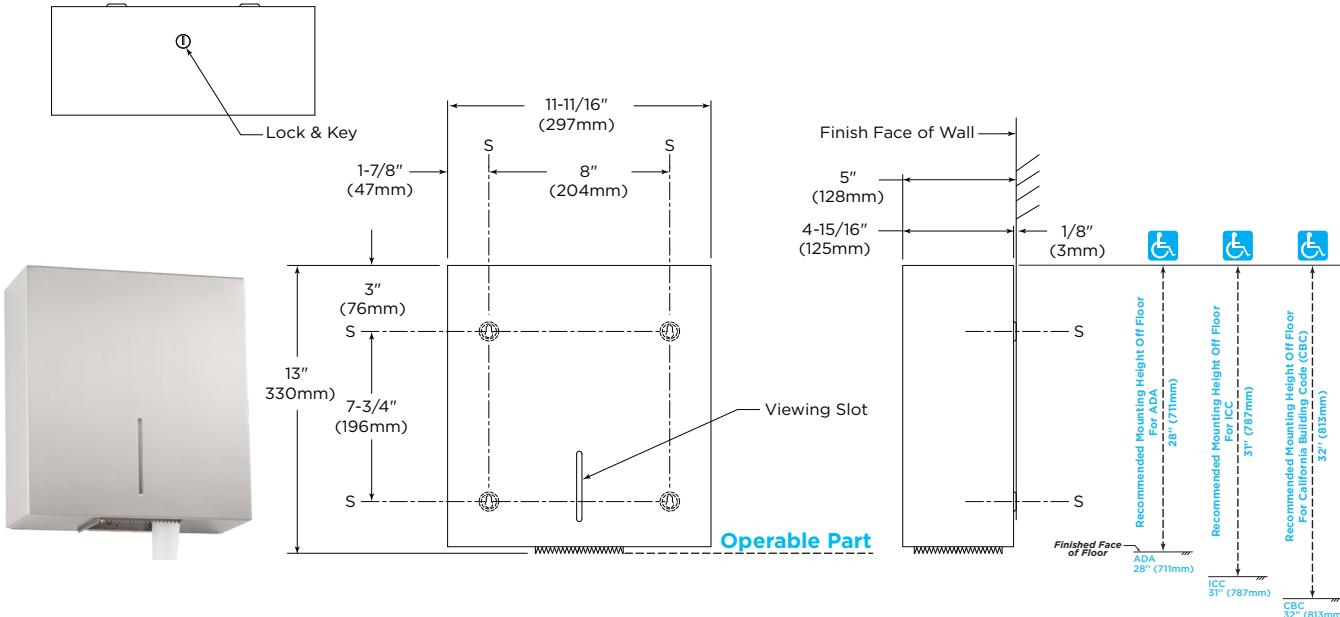


BOBRICK**Technical Data***fino* collection
Surface-Mounted
Single Jumbo-Toilet
Roll Holder**B-9890****Specify Finish Required**

Stainless Steel, Satin Finish
 Matte Black Finish, please use model no. B-9890.MBLK

**ADA/CBC Installation Guidance**

***Operable Part:** Toilet tissue dispenser opening on the bottom of the cabinet.

Minimum mounting height of Operable Part:

ADA: 15" (381mm) above finished floor (AFF)

ICC: 18" (457mm) above finished floor (AFF)

CBC: 19" (483mm) above finished floor (AFF)

*For more information regarding operable parts, please refer to Bobrick Planning Guide for Accessible Restrooms, page 9.

MATERIALS:

Cabinet — Unit is of type 304, 18-gauge (1.2mm) stainless steel satin finish or matte black as specified. All seam-welded construction with well defined edges and corners. Cabinet is connected to backplate via a hinge at the unit's rear bottom. Cabinet-swing-limiter allows cabinet to open down to a horizontal position, which eases refill of toilet roll and prevents cabinet from harming the wall when opening. Slot reveals toilet tissue supply inside cabinet. Equipped with a tumbler lock keyed like other Bobrick Washroom Equipment accessories. Lock is on top of unit flush with the surface - no protrusion.

Spindle — fixed inner spindle, 18-gauge (1.2mm), stainless steel, seam welded against backplate. Adapters for different toilet-roll-core diameters are furnished (cap and o-rings).

Backplate — 18-8, type-304, 20-gauge (0.91mm) stainless steel.

continued . . .

OPERATION:

Door unlocks with key provided and swings down for loading dispenser. Spindle adapter accommodates one toilet tissue roll up to 10" (255mm) diameter with a 1-5/8" (40mm) diameter core roll; convertible for 3" (75mm) diameter core rolls. Rubber o-rings (2) (furnished by manufacturer) may be added to the steel inner spindle to accommodate a 2-1/8" (55mm) diameter core roll. Viewing slot in door reveals the amount of toilet tissue on roll. Unit is designed for quick reloading.

5-Year Limited Warranty — In addition to Bobrick's one-year guarantee, Bobrick extends a limited 5-year warranty from the date of purchase on all parts for model B-9890. This warranty is limited to the repair or exchange of defective parts at the option of Bobrick and is only extended to the original owner of the installed unit against defects in factory workmanship or material under normal use and service.

INSTALLATION:

Mount unit on wall or toilet partition with sheet-metal screws at points indicated by an S. Rear edge of unit should be 20" (510mm) from back wall. This locates toilet tissue within 7"-9" (180-230mm) of front of standard toilet that projects 30" (305mm) from back wall.

For plaster or dry wall construction, provide concealed backing to comply with local building codes, then secure with sheet-metal screws (not furnished). For other wall surfaces, provide fiber plugs or expansion shields for use with sheet-metal screws (not furnished), or provide 1/4" (6mm) toggle bolts or expansion bolts.

For partitions with particle-board or other solid core, secure with sheet-metal screws (not furnished), or provide through-bolts, nuts, and washers. For hollow-core metal partitions, provide solid backing into which the sheet-metal screws can be secured. If two units are installed back-to-back, then provide threaded sleeves and machine screws for the full thickness of partition.

SPECIFICATION:

Surface-Mounted Single Jumbo-Toilet Roll Holder door shall be 18-gauge (1,2mm) stainless steel with satin-finish or matte black as specified. Cabinet shall be equipped with a lock keyed like other Bobrick washroom accessories. Lock is on top of unit flush with the surface - no protrusion. Cabinet shall have a slot to reveal toilet tissue supply inside cabinet. Spindle shall accommodate one toilet tissue roll up to 10" (255mm) diameter with a 1-5/8" (40mm) diameter core roll convertible for 3" (75mm) diameter core rolls or 2-1/8" (55mm) diameter core roll by adding rubber o-rings (2) furnished.

Surface-Mounted Single Jumbo-Toilet Roll Holder shall be Model B-9890 of Bobrick Washroom Equipment, Inc., Clifton Park, New York; Jackson, Tennessee; Los Angeles, California; Bobrick Washroom Equipment Company, Scarborough, Ontario; Bobrick Washroom Equipment Pty. Ltd., Australia; and Bobrick Washroom Equipment Limited, United Kingdom.