


# HIGH SECURITY ACCESS DOOR

FOR ALL SURFACE TYPES

# PHS

## INSTALLATION

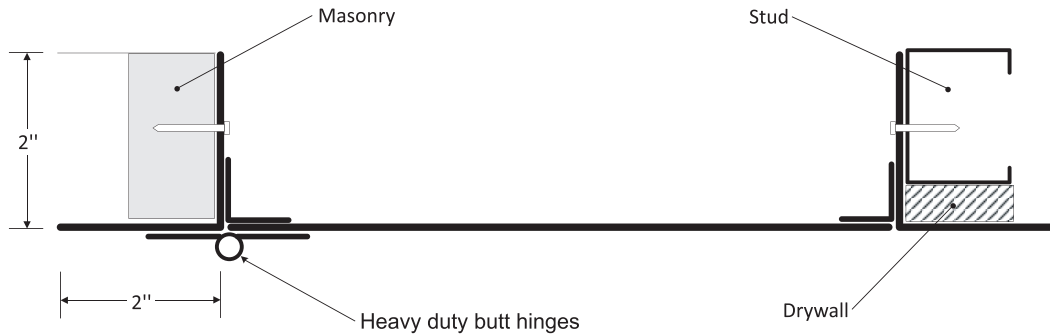


## DIMENSIONS AND APPEARANCE

LEED ready: This product contributes to LEED® credits.

DOOR SIZE - W x H INCHES (MM)	WEIGHT	
	LBS	KG
12 x 12 (304 x 304)	22	10
16 x 16 (406 x 406)	30	13.6
18 x 18 (457 x 457)	34	15.4
24 x 24 (609 x 609)	49	22.2
24 x 30 (609 x 762)	57	25.9
24 x 36 (609 x 914)	65	29.5
36 x 36 (914 x 914)	86	39
Rough wall opening is door size + 1/4" or + 6mm		

**Your odd sizes:  
Made in 5 days**

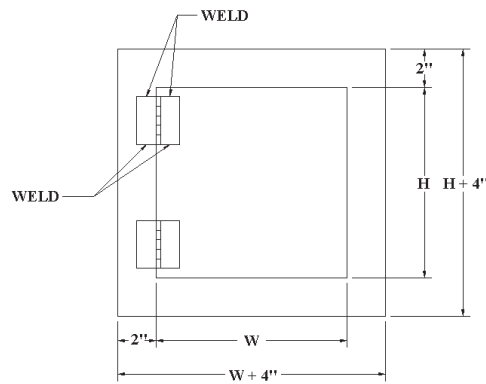

Lock and cylinder optional

## DESCRIPTION AND MATERIAL SPECIFICATION

## CENDREX PARTNERS

**Material:** 10 gauge cold rolled steel plate  
2" x 2" x 3/16" thick angle frame

**Hinge:** 3" x 3" (13 Ga Steel) heavy duty butt hinges  
13 gauge cold rolled steel

**Lock / latch:** as per customer's request

**Finish:** high quality white powder coat primer

**Packaging:** individually wrapped, 1 per box

**POPULAR OPTIONS** For complete list of options go to: [www.cendrex.com](http://www.cendrex.com)

**Lock / latch:** mortise preparation (cylinder optional),  
mortise deadbolt lock,  
mortise preparation for detention lock



## PROJECT DATA

PROJECT NAME:	QTY	W	H	OPTIONS
ARCHITECT:				
DEALER:				
CONTRACTOR:				
LOCATION:	SPECIAL INSTRUCTIONS:			
DATE:				
TAGGING INSTRUCTIONS:	SUBMITTAL APPROVAL: (signature or stamp)			

**HEAD OFFICE:** 11 303, 26th avenue, Montreal, Quebec, Canada H1E 6N6

**WAREHOUSES:** California, Colorado, Florida, Illinois, Pennsylvania, Texas

**Tel.:** 514 493-1489 - 1 800 479-1489

**Fax:** 514 493-1992 - 1 800 297-1489

[www.cendrex.com](http://www.cendrex.com)

[info@cendrex.com](mailto:info@cendrex.com)