SUBMITTAL: MODEL CT™ FLUSH ACCESS PANELS

An Access Panel with Recessed Door and Trimless Frame with 14 Gauge Frame.

Designed to accommodate an insert up to 1/2" thickness in the door. Acoustical tile or drywall can be attached to the door with adhesive to be flush with the surrounding tile field. A continuous hinge, located at the outside edge of the door ensures easy opening of the plaster or tile covered panel. Not to be used for suspended ceilings.

SPECIFICATIONS:

Door Panel: 16 gauge steel, recess to accommodate 1/2" thick insert.

Frame: 14 gauge steel


Finish: White powder coat paint.

Hinge: Recessed, continuous hinge mounted on the long side of oblong panels.

Lock: Flush screwdriver-operated steel cam standard "C" **Sizes:** Minimum 6" x 6" (152.4 x 152.4 mm), maximum 36"x 36"

PAGE 1 OF 2







Recessed Door Accepts 1/2" Insert

STEP 1: SELECT MODEL NUMBER AND QUANTITY ON CHART

STEP 2: SELECT MATERIAL

CT Steel

____ CTG Galvanized (Additional Cost)

Please Note - Color Codes and Lock Option Codes have Changed.



STEP 3: SELECT OPTIONAL FEATURES AT ADDITIONAL COST:

Optional color Code: _____ - see page 2

(L) Cylinder lock installed

(C2) Torx head cam

(C4) Hex head cam

(C3) Spanner head cam

(M1) Mortise cam lock prep 1-1/8" dia, 1-1/4" length


(M2) Mortise cam lock (06431) installed

Optional Door Panel Depth (Contact Manufacturer)

14 Gauge frame and 14 gauge door



Standard Cam Latch

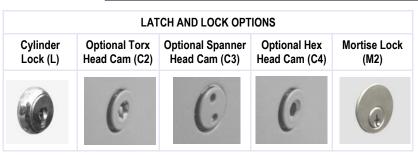



Distributor:

Contractor:

Approved By:

Model #:

Architect:

Project:

Date:

*DOWNLOAD CURRENT SUBMITTAL BEFORE ORDERING

© 2020 ACTIVAR CONSTRUCTION PRODUCTS GROUP— CT™ IS A TRADEMARK OF ACTIVAR

HEADQUARTERS: 9702 NEWTON AVE S, BLOOMINGTON, MN 55431 Ph: 800-554-6077 FAX: 952-835-2218 EMAIL: SALES@ACTIVARCPG.COM WWW.ACTIVARCPG.COM
MANUFACTURING: BLOOMINGTON, MN & COMMERCE, CA WAREHOUSES: FORT MYERS FL. DALLAS TX, LANCASTER PA, ATLANTA GA, CHICAGO IL, SEATTLE WA, OMAHA NE, FARGO ND

5/26/2020

SUBMITTAL: MODEL CT™ FLUSH ACCESS PANELS

	A - MODEL SIZE = DOOR SIZE	B - OUTSIDE FRAME DIMENSIONS		SHIPPING WEIGHT	LATCH
QTY	WIDTH X HEIGHT	WIDTH	HEIGHT	APPROX.	(ES)
	12" x 12"	12 1/4 "	12 1/4 "	9 lbs	1
	12" x 24"	12 1/4 "	24 1/4 "	14 lbs	2
	18" x 18"	18 1/4 "	18 1/4 "	15 lbs	3
	22" x 30"	22 1/4 "	30 1/4 "	26 lbs	4
	24" x 24"	24 1/4 "	24 1/4 "	24 lbs	4
	24" x 36"	24 1/4 "	36 1/4 "	34 lbs	5
	36" x 36"	36 1/4"	36 1/4"	51 lbs	6

