

# SUBMITTAL: MODEL TMW™ FLUSH ACCESS PANEL WITH WALLBOARD BEAD

The Wallboard Bead Model for walls or ceilings eliminates visual distractions by providing a smooth paintable surface with concealed hinge. The wallboard bead provides a tapered way to conceal the rough opening when taped and finished for an attractive appearance.

**SPECIFICATIONS:**

**Frame:** 16 gauge steel with 1" drywall bead flange that can be taped and finished.

**Door Panel:** Paintable, 16 gauge steel with continuous concealed hinge.

**Finish:** White powder coat paint.

**Lock:** Flush screwdriver-operated steel cam standard (C).

**Sizes:** Minimum 6" x 6", Maximum Size Walls - 36" x 48", Ceilings - 36" x 36".

**STEP 1: SELECT MODEL FROM PAGE 2 OR ENTER SIZE:**

\_\_\_\_\_ For sizes not shown on chart. \_\_\_\_\_" W x \_\_\_\_\_" H (See sizes above)

**STEP 2: SELECT NON-STANDARD FRAME AND DOOR OPTIONS AT ADDITIONAL COST:**

- Cold Rolled Steel (TMW) \_\_\_\_\_ 14 gauge door with 16 gauge frame
- \_\_\_\_\_ 16 gauge door with 14 gauge frame
- \_\_\_\_\_ 14 gauge door with 14 gauge frame
- 304 Stainless Steel (TMWS) \_\_\_\_\_ 14 gauge door with 16 gauge frame
- \_\_\_\_\_ 16 gauge door with 14 gauge frame
- \_\_\_\_\_ 14 gauge door with 14 gauge frame



Standard Cam Latch



**STEP 3: SELECT OPTIONAL FEATURES AT ADDITIONAL COST:**

- Optional Color Code: \_\_\_\_\_ - see [Website](#) & p2
- R-Red, BK-Black, S-sand, B-Bronze
- FB-Flat Black, AB-AMS Beige,
- SB-SC Flat Beige, SI—Silver, G-Gray
- Plexiglass view window
- Removable Door (no hinges)
- Gasketing 3 Sides of Door
- (L) Cylinder lock installed
- (M1) Mortise cam lock prep 1-1/8" Ø 1-1/4" L
- #0646 Brass Retaining Ring for MP \* (may be required for locks by others)
- Louvered vents (attach louver selector page)
- (M2) Mortise cam lock (06431) installed
- (U3) Mortise slam lock prep
- (U4) Mortise slam lock (06431) installed
- (B1) Mortise deadbolt prep
- (B2) Mortise deadbolt lock (06441) installed
- (C5) Knob cam
- (C2) Torx head cam [View Lock Options Online](#)
- (C4) Hex head cam
- (C3) Spanner head cam
- Other 1-1/8" dia. mortise cylinder by request  
Note lock details here: \_\_\_\_\_
- 316 Stainless construction (Select 304 Option Above)


Order Format Example: **TMW-2424CW**

TMW - Width Height Lock (C Std or Optional Lock Code) - Color - Options  
 TMWS

LATCH AND LOCK OPTIONS					
Mortise Lock (M2) (U4) (B2)	Cylinder Lock (L)	Torx Head Cam (C2)	Spanner Head Cam (C3)	Hex Head Cam (C4)	Knob Cam (C5)

<p><b>*DOWNLOAD CURRENT SUBMITTAL BEFORE ORDERING*</b>                  TMW™ IS A TRADEMARK OF ACTIVAR</p>	Distributor:	Quantity:
	Contractor:	Approved By:
	Model #:	Architect:
	Project:	Date: © 2020 ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC
HEADQUARTERS: 9702 NEWTON AVE S, BLOOMINGTON, MN 55431 PH: 800-554-6077 EMAIL: SALES@ACTIVARCPG.COM WWW.ACTIVARCPG.COM MANUFACTURING: BLOOMINGTON, MN & COMMERCE, CA WAREHOUSES: FORT MYERS FL, DALLAS TX, LANCASTER PA, ATLANTA GA, CHICAGO, IL, SEATTLE WA, OMAHA NE, FARGO ND <b>5/26/2020</b>		

QTY	A - MODEL SIZE = DOOR SIZE		B - OUTSIDE FRAME DIMENSIONS IN INCHES		C-WALL OPENING DIMENSIONS FITS ± 1/8" OPENING SIZE		SHIPPING WEIGHT APPROX	LATCH (ES)
	W x H	WIDT H	HEIGHT	WIDTH	HEIGHT			
	8" x 8"	10	10	8-1/2"	8-1/2"	4	1	
	10" x 10"	12	12	10-1/2"	10-1/2"	5	1	
	12" x 12"	14	14	12-1/2"	12-1/2"	7	1	
	14" x 14"	16	16	14-1/2"	14-1/2"	8	1	
	16" x 16"	18	18	16-1/2"	16-1/2"	10	1	
	18" x 18"	20	20	18-1/2"	18-1/2"	12	3	
	22" x 22"	24	24	22-1/2"	22-1/2"	16	4	
	22" x 30"	24	32	22-1/2"	30-1/2"	21	4	
	24" x 24"	26	26	24-1/2"	24-1/2"	19	4	
						TBD	TBD	
<p><b><u>Sizes Not Shown May Be Ordered in 1/4" Increments On Blank Line Above—For Example 16-1/4", 16-1/2" or 16-3/4"</u></b></p> <p>Minimum 6" x 6", Maximum Size Walls - 36" x 48", Ceilings - 36" x 36"</p>								

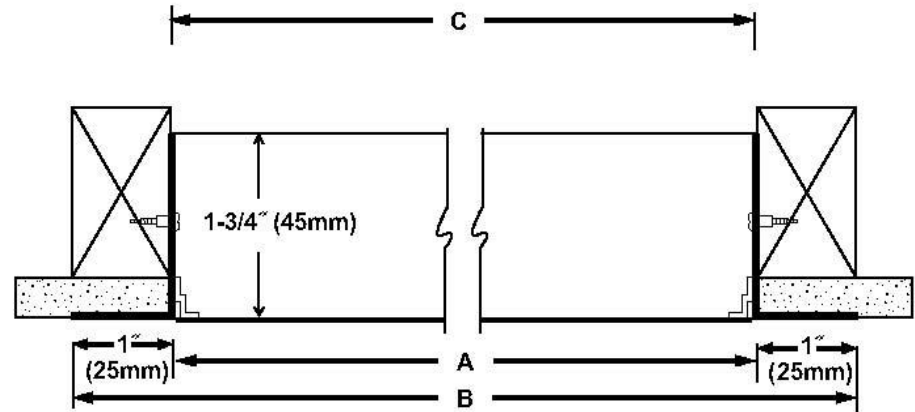

Standard Color is White, Optional Colors at Additional Cost - Samples Available

W (White)	B (Bronze)	R (Red)	BK (Black)	S (Sand)	AB (AMS Beige)	SB (SC Beige)	G (Gray)	SI (Silver)
-----------	------------	---------	------------	----------	----------------	---------------	----------	-------------