


# TABLE BASE ASSEMBLY

## Cast Iron - Round Style Bases

For: 3000 Round Dome / 3300 Flat / 3100 Sun / 3200 Radiant  
See Catalog for Top Size Recommendations

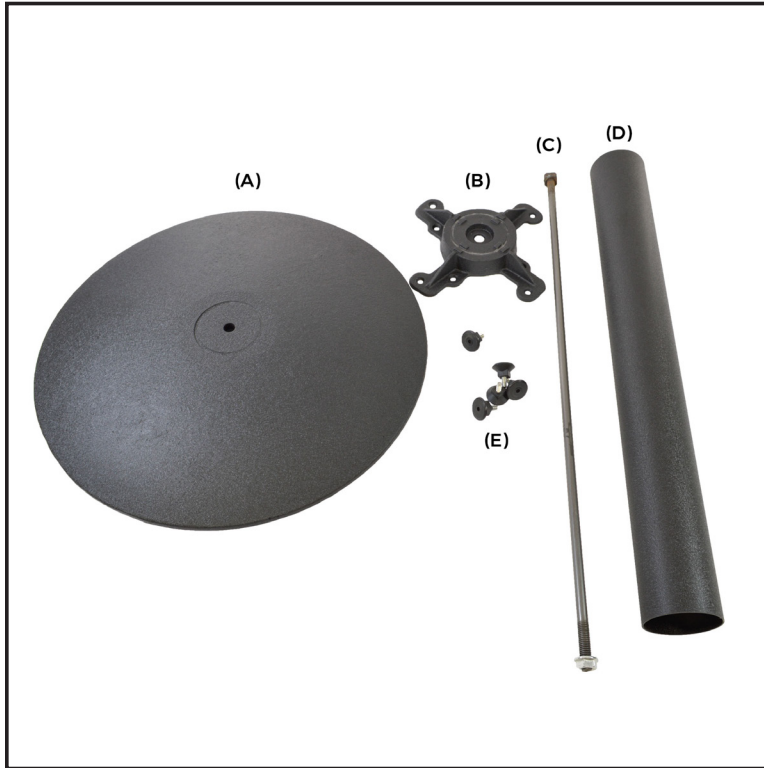

### Part List:

- A- Base Plate
- B- Spider Top Plate
- C- Connecting Rod with M12 Hex Nut
- D- Column
- E- (x5) Adjustable Glides

### Instructions:

- Step 1** - Thread the adjustable glides (E) into the base plate (A) and set aside.
- Step 2** - Insert the connecting rod (C) through the spider top plate (B) as shown below. Make sure the square head is aligned between the raised guides.
- Step 3** - Slide the column (D) over the rod assembly and align it in the grooves of the spider.
- Step 4** - Place the base plate (A) on the column assembly making sure the rod (C) goes through the center hole. The column (D) should sit in the groove of the base plate.
- Step 5** - Make sure everything is aligned correctly and proceed to tighten the table base with the included hex nut. Flip over the unit and adjust the glides as needed to level.

